




KY TYPE 208

Double Mechanical Seals

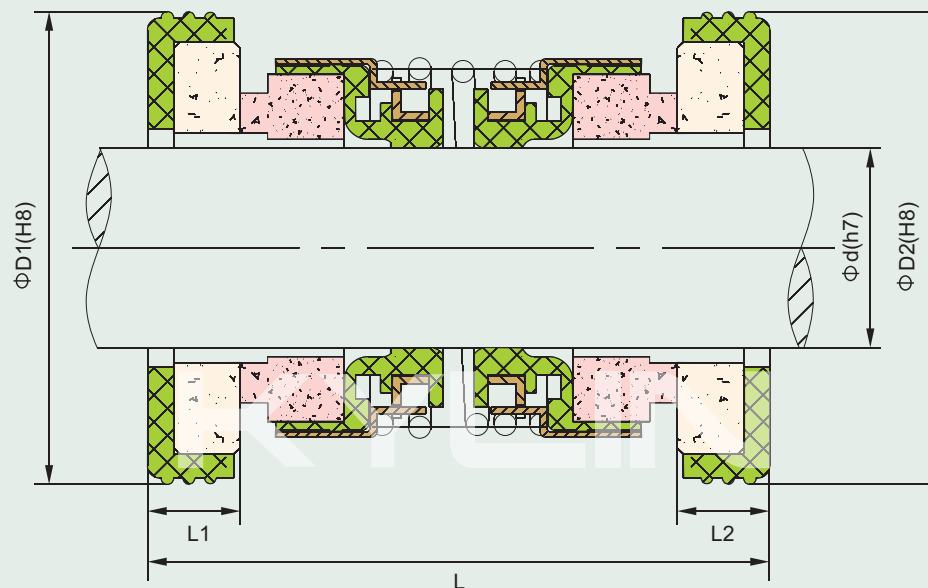

Part#	d	D1	D2	L	L1	L2
KY TYPE 208-10	10	21	21	30	5	5
KY TYPE 208-12	12	26	26	30	5	5
KY TYPE 208-14	14	26	26	38	5	5
KY TYPE 208-16	16	27	27	38	5	5
KY TYPE 208-18	18	33	33	38	5	5
KY TYPE 208-20	20	35	35	40	5	5
KY TYPE 208-25	25	40	40	48	7	7
KY TYPE 208-30	30	45	45	51	7	7
KY TYPE 208-35	35	50	50	51	8	8

Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts(Steel)

Working Conditions

- Pumps: Submersible pumps, sewage pumps, etc.
- Temperature: -20°C~100°C
- Pressure: $\leq 0.35\text{MPa}$
- Speed: $\leq 6\text{ m/Sec}$

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com