

KY TYPE 606


Combined Materials

- Stationary Ring (SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (Graphite)
- Bellow (AM350/Inconel 718)
- Metal Part (Stainless Steel 304, 316)

Compatibility:

- John Crane TYPE 606

Part#	d	D	L1
KY TYPE 606-16	19.05	41.28	58.92
KY TYPE 606-18	22.23	44.45	59.71
KY TYPE 606-20	25.4	47.63	59.71
KY TYPE 606-22	28.58	50.8	60.53
KY TYPE 606-24	31.75	53.98	60.53
KY TYPE 606-26	34.93	57.15	62.89
KY TYPE 606-28	38.1	60.33	63.7
KY TYPE 606-30	41.28	63.5	63.7
KY TYPE 606-32	44.45	66.68	64.49
KY TYPE 606-34	47.63	69.85	64.49
KY TYPE 606-36	50.8	73.03	65.27
KY TYPE 606-38	53.98	76.2	65.27
KY TYPE 606-40	57.15	82.55	70.05
KY TYPE 606-42	60.33	85.73	70.84
KY TYPE 606-44	63.5	88.9	70.84
KY TYPE 606-46	66.68	93.65	73.23
KY TYPE 606-48	69.85	96.82	76.4
KY TYPE 606-50	73.03	101.6	76.4
KY TYPE 606-52	76.2	104.78	76.4
KY TYPE 606-54	79.38	107.95	76.4
KY TYPE 606-56	82.55	111.13	76.4
KY TYPE 606-58	85.73	114.3	76.4
KY TYPE 606-60	88.9	117.48	76.4
KY TYPE 606-62	92.08	120.65	76.4
KY TYPE 606-64	95.25	123.83	76.4

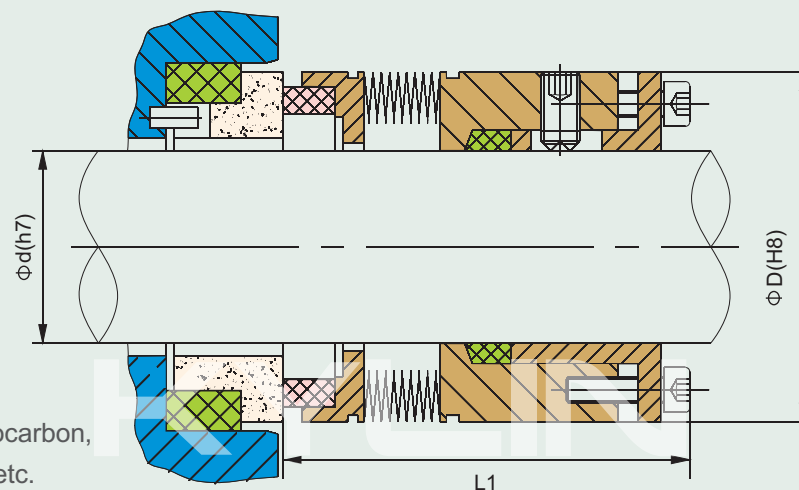

Working Conditions

- Mediums: Oil, light hydrocarbon, aromatic hydrocarbon, organic solvents, weak acids, alkali, Ammonia, etc.
- Temperature: -75°C~400°C
- Pressure: $\leq 2.0\text{MPa}$ (Single) $\leq 6.0\text{MPa}$ (Double)
- Speed: $\leq 23\text{m/Sec}$

**Welded Metal
Bellow
Mechanical Seals**

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com